

Instructions for *SprayAlert*® Pet Urine Alarm

Always be aware of your pet's medical condition. Inappropriate urine elimination is often due to medical issues. Have your pet checked by a Veterinarian. Set product to lower volume level when dealing with sensitive animals and possible medical issues. Keep product away from small children, it is not a toy.

1. Plug one or two urine **sensors** as desired into Alarm box with unit turned off. One unit can accommodate one or two sensors at the same time.

2. Mount Sensor: Mount sensor(s) in the location where your pet typically sprays/urinates. Make sure the black printed ink side is facing out, on the same side as the wire connection glob. **Note: The urine must contact the front face of the sensor with the black printing to trigger alarm.** Use double-sided adhesive tape on the back side for mounting, or tacks or pins in the holes on the sensors. Don't use tape on the front side on top of the black printing. For alarm to act best as a deterrent, face alarm unit toward where the pet will be spraying, but a foot or two away so it won't be a distraction.



On vertical surfaces such as walls the sensor must be flush with mounting surface. Place it where dripping urine will run over the face of the sensor. On flat or horizontal surfaces, secure it in place with double sided adhesive or tape. Minimize loose hanging cable to discourage pet from playing with it. Tape it down if necessary, especially to hide from curious dogs.

3. Test (with pet out of hearing range!): Turn unit on. LED should blink green. Verify that the alarm will trigger by touching the sensor black printing with a moist finger or damp sponge. Set volume as desired to high or low. Use "High" for most cases if trying to act as a deterrent, "Low" for sensitive pets. Further reduction in volume can be achieved by placing tape over the sound holes on the front.


Turn unit off to reset. Blot sensor dry, then turn back on. Any leftover moisture will trigger the alarm. You are ready now for your pet. When the green light is blinking the alarm is armed and ready.

4. Check triggered alarm: When alarm is triggered, audio alarm sounds for 9 seconds. Red light blinks indefinitely until unit is turned off or reset (to tell you later in case you're not home). **ALWAYS check the area for urine and moisture. False alarms occur occasionally from wet noses and drool or damp paws. Don't assume it was from pet urine.**

5. Clean Sensor:

Rinse sensor only with water or water and mild detergent. Don't use chemicals or harsh cleaners or abrasives. Do not scratch or bend. Gently dry with paper towel or hair dryer but don't overheat. Any residual moisture or residue may cause it to trigger continuously.

Product support email support@spryalert.com. See www.spryalert.com for more information

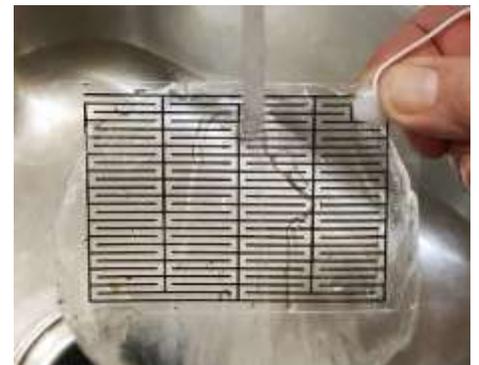

The **SprayAlert** is an electronic alarm monitoring system for detecting pet urine spraying and marking as well as used for pet training.

Use this product to

- Detect pet urine spraying and marking and minimize damage to home, furniture
- Pet training to stop or reduce spraying behavior in some cases for dogs

A good training candidate is a dog that is marking habitually, in a few spots or less. Cats typically do not respond well to training.

For them, addressing behavioral issues is usually the best solution.

- Monitor areas previously sprayed. Follow progress of preventative measures
- Identify sprayer for medical assessment in multipet households
- Manage cleanup of habitual sprayer



Product Description: The front panel LED flashes green every second when unit is turned on. The urine sensors plug into jacks on either or both sides of the unit. When moisture bridges the small gap between adjacent printed conductors, the alarm is triggered, sounds for 9 seconds and LED flashes red until turned off. Two urine sensors can be used simultaneously to cover a wider area or two separate areas within reach of the 3' cables. Several different sizes of sensors are available to cover different size areas. Three AAA batteries power the unit. Expected battery life is > 1 year. Unit will emit intermittent beep when battery is low.

Dogs and cats are hypersensitive to smells and live in a scent-centered world. They instinctively spray urine to mark their territory. The SprayAlert Alarm instantly emits a startling sound when sprayed by urine (or any other moisture). Place the sensor in an area where the pet typically marks. The startling sound from the Alarm Unit (below) disrupts spraying behavior and may act as a deterrent.

The key to changing behavior is to interrupt it in a startling manner as it happens. Then present positive options. The SprayAlert Alarm triggers immediately when the sensor is contacted by urine. The alarm duration is brief, less than ten seconds. Changing pet behavior depends on many factors including the history of the pet and how prolific and habitual the spraying behavior. The pet's sensitivity and reaction to the alarm noise is also a factor. Dogs are much better candidates for training and behavior than cats. Addressing stress and behavioral issues is necessary for cats.

HINTS:

Test system anytime by touching sensor with damp finger or sponge bridging adjacent black lines on the sensor.

Your pet may be spraying in areas you are unaware of. Scan your home using a quality blacklight in darkened rooms to find pet spraying locations. Under fluorescent blacklight, pet spray glows.

Neutralize sprayed area immediately with an enzyme-based product to keep urine from being absorbed (Powdered OxyClean mixed double strength with hot water and sprayed on area is effective and inexpensive).

For product support email support@spryalert.com. Visit www.spryalert.com for more information. Manufactured in USA by Peak Design Inc., Mesa AZ 85202 US Patent 6,860,239

